



 **Where Ideas Meet Industry**

# PCM<sup>+</sup> PLUS<sup>+</sup>



## Pipeline Current Mapper



**Radiodetection**  
AN SPX COMPANY

## Locate

Accurately find buried pipes, establish centerline depth, then troubleshoot coating defects

## Record

Stores up to 1000 PCM and Location measurements in Flash memory

## Upload

Saved receiver data is uploaded in realtime to a PDA or PC via Bluetooth® for GPS synchronization

## Review

All uploaded data displayed in graphical format for immediate or post survey analysis

# Fast locate and effective measurement of pipeline coating defects

The location and measurement of pipeline corrosion using electromagnetic detection devices (Locators) are increasingly being linked with GIS systems and GPS information, to provide an accurate record of the condition of pipes and the position and time co-ordinates for post mapping analysis – this requirement is the basis of the PCM<sup>+</sup>.

As part of Radiodetection's commitment to protecting the environment the PCM<sup>+</sup> enables the pipeline technician to carry out preventative maintenance on pipelines giving them a longer life and identifying corrosion at an earlier stage.

The PCM<sup>+</sup> System consists of a portable transmitter and a hand held receiver. The transmitter connected at the CPS station or test post, applies a special signal to the pipeline. The receiver locates this unique signal at distances up to 30km (19 miles) identifying the position and depth of the pipe.

Once the pipe has been located the technician can map the leakage currents along the pipe in magnitude and direction allowing coating defects to be quickly identified.

Once the segment of pipeline where the defect lies has been identified, by using an A-frame, the defect position and depth can be further pinpointed to within 1 meter (3 feet).

The PCM<sup>+</sup> using its powerful feature set including Automatic Signal Attenuation (ASA), accurately and easily locates and maps the pipeline even in areas where there is contact with other metallic structures, electrical interference, or congestion, providing simultaneous measurement of PCM current (ACCA) and Voltage Gradient (ACVG).

This eliminates the need for the operator to perform 'current spans' and manual calculations to determine CP currents along a pipeline that would usually require a direct connection.

Each time the PCM<sup>+</sup> maps in any of the modes, as well as storing and displaying the information on the receiver, all the data gathered can be sent via Bluetooth® to either a PC or an optional PDA (with GPS), and displayed in a number of graphical formats for fast analysis.

The PCM<sup>+</sup> and its accessory equipment provide any pipeline technician with the latest in accurate, fast and reliable pipeline current mapping tools.

### PCM<sup>+</sup> Receiver features

- Precision locator and PCM in one unit
- Unique features to improve data integrity
  - ASA Maintains performance in strong magnetic fields such as Power sub-stations
  - Depth of utility in Power Mode
- Current mapping
  - Quicker 3 second ACCA mapping
  - Up to 1000 data records
- Real time upload of mapped data via Bluetooth® to PDA or PC
  - Integrates GPS data
- Downloadable analysis software for PDA and PC
  - Integrates with standard GIS software
  - 5 key graph mapping modes including locate depth, current and phase
- Low power for full day survey
- Backlight / Real sound

### PCM-Tx Transmitter features

- High power 150 Watt
- 30km (19 miles) range @ 4Hz

## PCM<sup>+</sup> Receiver


The hand held receiver unit is used to locate the pipeline, even in heavily congested areas such as conduits, and then provides the operator with a measurement of depth current strength and signal direction applied by the transmitter to quickly pinpoint corrosion related problems.

The receiver makes the required calculations and instantaneously displays the results. This provides the operator with an improved method that accurately troubleshoots the CP system by pinpointing metallic contacts and locating areas of coating defects.



## Real time mapping analysis (PDA or PC) using Radiodetection GML Survey software

To provide faster analysis of mapped information, the PCM<sup>+</sup> connects wirelessly with a PDA or PC, uploading all the information immediately and linking it with GPS into a database using the Radiodetection Survey software. The database is updated after each mapping and can be seen immediately on the PC or PDA in either a database or a choice of graphical formats. The information can then be imported into most of the standard post processing software programs available.

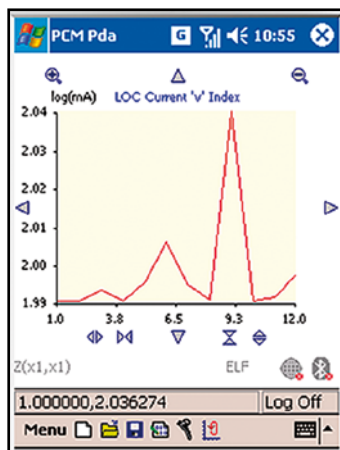

The Radiodetection Survey software incorporates GPS information and shows the mapped data in a variety of formats as well as allowing comparisons between new and old mapping surveys.

For more details go to [www.radiodetection.com](http://www.radiodetection.com)

## PCM-Tx Transmitter


The PCM<sup>+</sup> system's specialized constant current high-power transmitter allows for long range signal detection of up to 30km (19 miles). Significantly fewer pipeline connection points are needed thereby reducing the time required to evaluate a section of pipeline.

The transmitter has three operating modes that enable both distribution and transmission pipeline systems to be effectively mapped.

Connecting the PCM<sup>+</sup> is straightforward, and the transmitter's current reading DISPLAY and power indicating LED's help the operator to choose the best settings for the specific pipeline application.

## A-Frame

The A-Frame is used with the PCM<sup>+</sup> receiver to precisely pinpoint coating defects and isolation faults. The PCM<sup>+</sup> receiver display indicates direction to the fault, using the CD arrows, and this makes fault position easy to locate. The PCM<sup>+</sup> also displays the dB microvolts reading across the A-Frame spikes, and this allows a comparison to be made between different faults to determine the most severe. This numeric value is stored in the PCM's datalogging facility, and uploaded via Bluetooth<sup>®</sup> to a PDA or PC.

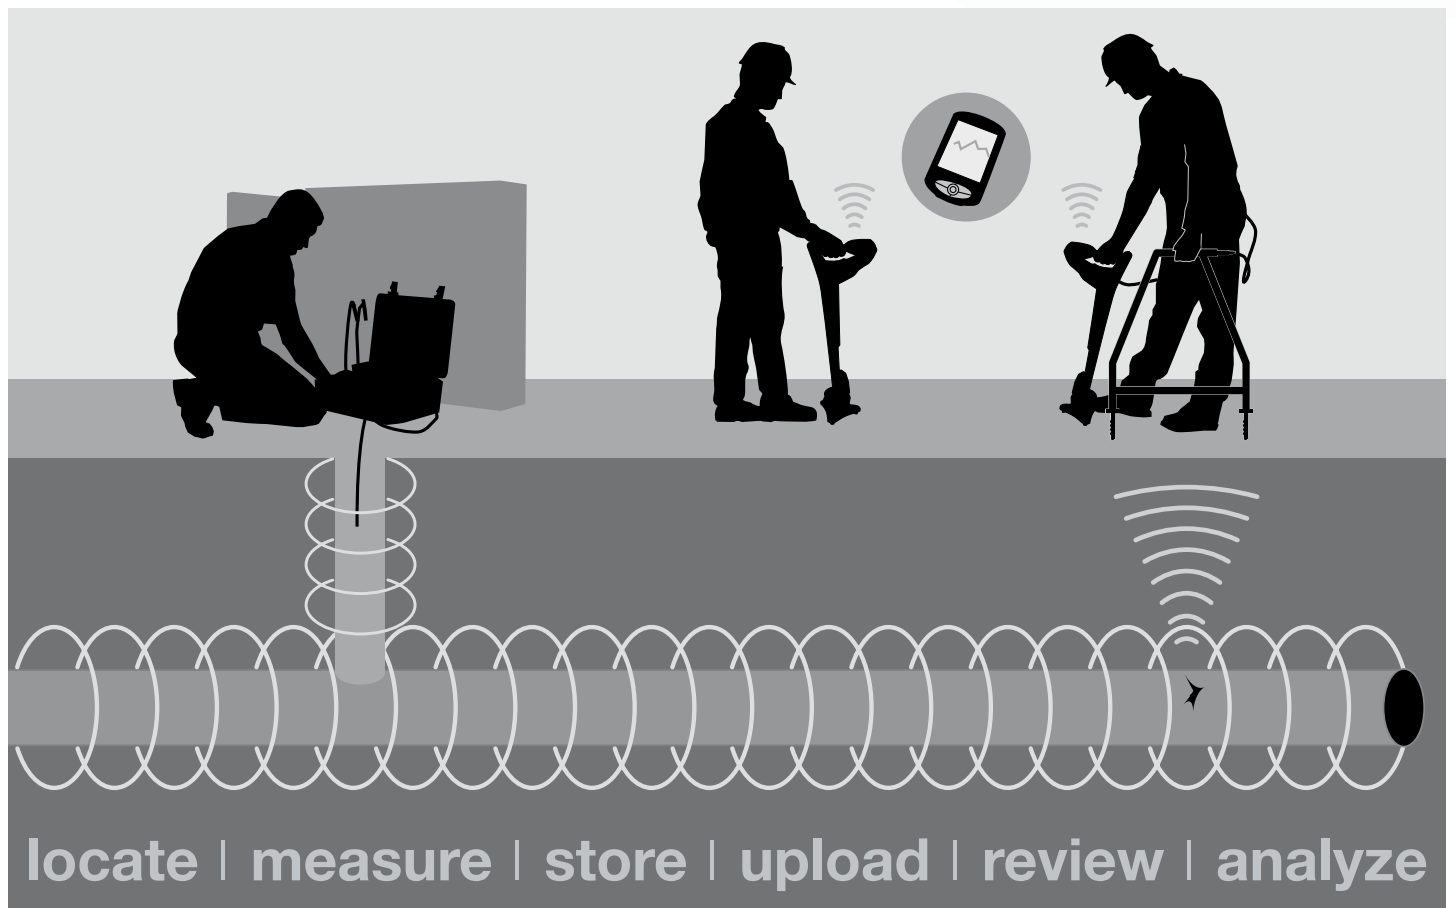



## Pipeline Current Mapper

Fast location with accurate mapping, minimizes unnecessary excavations

## Data upload

Bluetooth® link to PDA/PC for real time logging with GPS into Radiodetection GML Application

## Interference rejection

DSP based algorithms enable filtering of false signals even in areas where there is contact with other metallic structures

## High power Tx 30 km (19 miles)

Fewer connection points speeds up survey time over long distances

# Technical Specifications

## PCM<sup>+</sup> Receiver

### MAPPING MODES

ELF	Extra Low Frequency	4Hz+128Hz/98Hz
LF	Low Frequency	640Hz/512Hz
8kHz	Standard locate frequency from battery powered Radiodetection transmitters	

NB: Current Direction (FF) arrows are displayed only with the PCM measurement, and not in locate modes, unless the PCM is supplied with CD frequency.

### LOCATE MODES

⚡	Detects 50Hz/60Hz from power cables
CPS	Detects 100Hz/120Hz ripple from CP transformer rectifier
8kHz	Standard locate frequency from battery powered Radiodetection transmitters

- **Dynamic Range:** 140dB
- **Selectivity:** 120dB/Hz
- **Range from Tx:** 30km (19 miles)
- **Depth accuracy:** 2.5% to 3 meters (10ft); ± 5% to 5 meters (16.5ft) – in good conditions
- **Current accuracy:** ± 2.5%
- **Locate accuracy:** ±5% of depth
- **Weight:** 3.3Kg (7.2lb)
- **Batteries:** 2 x LR20 D cells (Alkaline or NiMH)
- **Environmental:** IP54
- **Approvals:** CE, Bluetooth® compliant

### Peak/Null

- Used to pinpoint target line
- Selectable peak & null response
- Gain control: Via keypad auto & manual

## PCM-Tx Transmitter

### Frequency Select

Current Direction (CD) provides a positive identification of the 'out-going' current and provides a method of locating pipe faults using the A-Frame.

The three position switch selects the following mapping frequencies:

ELF	Maximum range for Current Logging 4Hz + 98Hz/128Hz
ELCD	Standard Current Logging with CD (4Hz + 8Hz) CD + 98/128Hz
LFCD	Improved depth, position and current logging accuracy with respect to ELCD. Shorter range operation (4Hz + 8Hz) CD + 512Hz/640Hz

\*The 4Hz mapping frequency is always present and the current is shown on the LCD. The operator has a choice of selecting the locate frequency and current direction indication if required for identification in congested areas or for fault finding.

- **Case construction:** High impact engineered plastics
- **Weight:** 15.2kg (34lb)
- **Size:** 47 x 37 x 19cm (18.5 x 14.5 x 7.5 inch)
- **Environmental:** NEMA 3R and IP55 – lid open; NEMA 6 and IP67 – lid closed
- **Approvals:** CE

### Current Select

The six position (current select) rotary switch selects the following 4Hz current settings:

100mA, 300mA, 600mA, 1A, 2A, 3A. When the PCM Transmitter is in operation, the selected current will remain at a constant level, unless the input power supply limit is reached.

### PCM Attachment (A-frame)

A-frame for detection of sheath faults on buried pipes and cables (includes PCM<sup>+</sup> connection cable).

- **Weight:** 1.55kg (3.4lb)
- **Size:** 8.5 x 59 x 4.5cm (33 x 39.3 x 1.7 inch)

## World leaders



Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.

## Technical support



Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.

## Servicing and repair



Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.

## Training



Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

### America

#### Radiodetection

154 Portland Road  
Bridgton, ME 04009, USA  
Tel: +1 (207) 647 9495  
Toll Free: +1 (877) 247 3797  
Fax: +1 (207) 647 9496  
Email: [rd.sales.us@spx.com](mailto:rd.sales.us@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Pearpoint

72055 Corporate Way  
Thousand Palms CA 92276, USA  
Tel: +1 800 688 8094  
Tel: +1 760 343 7350  
Fax: +1 760 343 7351  
Email: [pearpoint.sales.us@spx.com](mailto:pearpoint.sales.us@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34  
Concord, Ontario L4K 4B7, Canada  
Tel: +1 (905) 660 9995  
Toll Free: +1 (800) 665 7953  
Fax: +1 (905) 660 9579  
Email: [rd.sales.ca@spx.com](mailto:rd.sales.ca@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

### Europe

#### Radiodetection Ltd (UK)

Western Drive  
Bristol BS14 0AF, UK  
Tel: +44 (0) 117 976 7776  
Fax: +44 (0) 117 976 7775  
Email: [rd.sales.uk@spx.com](mailto:rd.sales.uk@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (France)

13 Grande Rue, 76220  
Neuf Marché, France  
Tel: +33 (0) 232 8993 60  
Fax: +33 (0) 235 9095 58  
Email: [rd.sales.fr@spx.com](mailto:rd.sales.fr@spx.com)  
Web: <http://fr.radiodetection.com>

#### Radiodetection (Benelux)

Industriestraat 11  
7041 GD 's-Heerenberg, Netherlands  
Tel: +31 (0) 314 66 47 00  
Fax: +31 (0) 314 66 41 30  
Email: [rd.sales.nl@spx.com](mailto:rd.sales.nl@spx.com)  
Web: <http://nl.radiodetection.com>

#### Radiodetection (Germany)

Groendahlscher Weg 118  
46446 Emmerich am Rhein, Germany  
Tel: +49 (0) 28 51 92 37 20  
Fax: +49 (0) 28 51 92 37 520  
Email: [rd.sales.de@spx.com](mailto:rd.sales.de@spx.com)  
Web: <http://de.radiodetection.com>

### Asia-Pacific

#### Radiodetection (Asia-Pacific)

Room 708, CC Wu Building  
302-308 Hennessy Road, Wan Chai  
Hong Kong SAR, China  
Tel: +852 2110 8160  
Fax: +852 2110 9681  
Email: [rd.sales.cn@spx.com](mailto:rd.sales.cn@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (China)

Hongfu Mansion, Room 61622  
Zheng Ge Zhuang, Bei Qi Jia Town  
Chang Ping District  
Beijing 102209, China  
Tel: +86 (0) 10 8975 5540  
Fax: +86 (0) 10 8975 5640  
Email: [rd.service.cn@spx.com](mailto:rd.service.cn@spx.com)  
Web: <http://cn.radiodetection.com>

#### Radiodetection (Australia)

Unit 14, 5-7 Prosperity Parade  
Warriewood NSW 2102, Australia  
Tel: +61 (0) 2 9979 8555  
Fax: +61 (0) 2 9979 7733  
Email: [rd.sales.au@spx.com](mailto:rd.sales.au@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

To see the full range of products and services provided by Radiodetection visit:  
[www.radiodetection.com](http://www.radiodetection.com)

Copyright 2009 Radiodetection Ltd - SPX Corporation. All rights reserved. Radiodetection is a subsidiary of SPX Corporation. SPX, Radiodetection and PCM+ are trademarks of Radiodetection Ltd. and SPX Corporation. The Bluetooth word, mark and logo are registered trademarks of Bluetooth SIG, Inc. and any use of such trademarks by Radiodetection is under license. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.



**Radiodetection**  
AN SPX COMPANY



Global Headquarters  
13515 Ballantyne Corporate Place  
Charlotte, North Carolina 28277  
United States

**Where Ideas Meet Industry**

**Where Ideas Meet Industry**

[www.spx.com](http://www.spx.com)